

金瑞盛
KIND-AUSPICE

金瑞盛實業有限公司
KIND-AUSPICE INDUSTRIAL CO., LTD

高雄市岡山區碧紅街153號
sales@kindauspice.com.tw
www.kindauspice.com.tw



WIRE 線材

TOOLING 模工具

FASTENERS 扣件



CERTIFICATE OF APPROVAL

This is to certify that the Quality Management System of:

KIND-AUSPICE INDUSTRIAL CO., LTD.
No. 12 Ren-Yi Road, 820 Kanshan, Kaohsiung, Taiwan

has been approved by Lloyd's Register Quality Assurance
to the following Quality Management System Standards:

ISO 9001:2008

The Quality Management System is applicable to:


Provision of Trading Service on Steel Wire, Fasteners and Tooling.

Approval
Certificate No: TWN6012717

Original Approval: 08 July 2011

Current Certificate: 22 June 2014

Certificate Expiry: 21 June 2017



Issued by: Lloyd's Register Inspection Limited Taiwan
Branch for and on behalf of Lloyd's Register Quality Assurance Limited



Rm. 1102, 11th, Worldwide House, 129 Min Sheng East Road, Sec. 3, Taipei 105, Taiwan, R.O.C.
for and on behalf of Hiramford Middlemarch Office Village Siskin Drive Coventry CV3 4FJ United Kingdom. Registration number 1879370
This approval is carried out in accordance with the LRQA assessment and certification procedures and monitored by LRQA.
The use of the UKAS Accreditation Mark indicates Accreditation in respect of those activities covered by the Accreditation Certificate Number 001

Lloyd's Register Group Limited, its affiliates and subsidiaries, including Lloyd's Register Quality Assurance Limited (LRQA), and their respective officers, employees or agents are, individually and collectively, referred to in this clause as 'Lloyd's Register'. Lloyd's Register assumes no responsibility and shall not be liable to any person for any loss, damage or expense caused by reliance on the information or advice in this document or howsoever provided, unless that person has entered a contract with the relevant Lloyd's Register entity for the provision of this information or advice and in that case any responsibility or liability is exclusively on the terms and conditions set out in that contract.

INDEX 目錄

INDEX 目錄	1
STORY 簡介	2-3
WIRE 線材	4-5
CONCRETE SCREW 水泥螺絲	6
MIRCO SCREW 微小螺絲	7
DRYWALL SCREW 乾牆螺絲	8
ROOFING SCREW 屋頂螺絲	9
CHIPBOARD SCREW 塑板螺絲	10
SELF DRILLING SCREW 鑽尾螺絲	11
NAIL SCREW 螺絲釘	12
SPECIAL PART 特殊品	13
SEMS SCREW 組合螺絲	14
NUT 螺帽	15
PUNCH 針具	16
DIE 模具	17
PIN 沖棒	18-19
CLIP 夾具	20
NUT TAP 絲攻	21
BIT 起子頭	22
THREAD ROLLING DIES 牙板	23
SCREW POINT CUTTING MACHINE 割尾機	24-25
CARBIDE ROD 鎢鋼棒材	26-27
CERTIFICATE 證書	28



KIND-AUSPICE

Company Profile

KIND-AUSPICE INDUSTRIAL CO., LTD was established in 1993, located in screw town – Gangshan, Kaohsiung, Taiwan. We had ISO certificates, and also member of “Taiwan Industrial Fasteners Institute” and chairman of “Taiwan Fastener Trading Association”. Our major products are raw material of steel, wire rod, steel wire, screw, fastener, bit, forming tooling, which could be applied in construction, engineering, furniture, and automobile industry. With great effort of General Manager - Cooper Tsai, and all staffs, the company upscale day by day, which have now been plunged into global market to approximately more than 100 customers in 30 countries. The top 3 export area is North America, South America, and Europe. Our turnover is about eighteen million US dollars annually. We continually develop new products and promote Taiwan fasteners to the world.

For expanding the business, we will relocate to a new plant at Bihong St. Gangshan Dist. Kaohsiung City. The new plant has extensive space, including marketing department, production management department, and quality control department. Establishing logistic warehouse area, following up the latest industry progress, and improving all operation progress provide better services. Besides, we purchase variety of inspection instrument, and professional print design software and hardware to control quality for customers.

Business Philosophy

Keep Our Team Focused on Continuous Improvement. In the changeable global marketing, Kind-Auspice is always with innovative and active altitude to seek the most beneficial solution for manufacturer, seller, and buyer.”

公司簡介

金瑞盛實業有限公司成立於西元1993年(民國82年)，位在台灣扣件重鎮-高雄岡山，通過ISO認證，且為台灣螺絲公會與台灣螺絲貿易協會會員與理事。主要產品行銷鋼鐵原物料、盤元、線材、螺絲、扣件、起子頭、模工具等，廣泛運用在建築、工業、家俱與汽車產業上；在董事長蔡榮煌先生及全體員工的努力下，公司規模日漸興盛，至今已行銷全球30多個國家100多家長期客戶，主要出口集中在北美、南美和歐洲，年營業額約美金一仟捌佰萬元，並持續不斷開發新產品，將台灣扣件推向全世界。

2018年為拓展業務需求，遷址至高雄市岡山區碧紅街，新廠佔地廣闊，完整規劃業務行銷、生產管理、品質管理等部門，設置物流倉儲空間，掌握最新產業趨勢，精進各項流程提升業務服務；此外更添購各種檢驗儀器及專業製圖等軟硬體設施，替客戶把關品質。

經營理念

『不斷自我要求與時俱進，在求新求變的國際行銷市場中，保持創新與活力的態度，為生產、銷售、購買三方尋求最大利益。』



WIRE 線材

Carbon Steel Wire 碳鋼


Size Available: 1.0mm~30.0mm

Stainless Steel Wire 不鏽鋼

Size Available: 1.5mm~20.0mm

Alloy Steel Wire 合金鋼

Size Available: 1.5mm~30.0mm

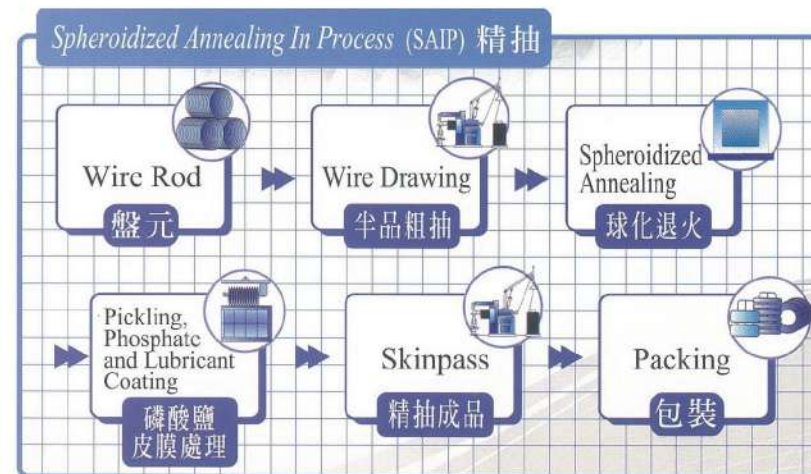

Feel free to advise any inquiries

- whole description、exact diameter & usage quantity
儘管提供您的任何詢價，務必告知完整敘述、正確尺寸和數量

Supply Steel WIRE ROD & WIRE from main steel corporations
of two sides across the China / Taiwan / Vietnam strait
可供應海峽兩岸及越南各大鋼廠的盤元及線材

Standard 規範

- ANSI-美國國家標準協會
- AISI-美國鋼鐵學會標準
- ASTM-美國材料與試驗協會標準
- ASME-美國機械工程師協會
- BS-英國國家標準
- DIN-德國國家標準
- GB(GB/T)-中華人民共和國國家標準
- ISO-國際標準化組織
- JIS-日本國家標準
- SAE-美國汽車工程師學會



CONCRETE SCREW 水泥螺絲





HEAD FLAT / IND HEX WASHER

DRIVE  

DIAMETER 3/16~1/4"

LENGTH 1-3/4~5"



MIRCO SCREW 微小螺絲



HEAD FLAT / PAN / TRUSS / IND HEX WASHER
ROUND WASHER / MODIFIED TRUSS

DRIVE      

DIAMETER #0~#4

LENGTH MINIMUM 1/8"

MATERIAL CARBON STEEL / STAINLESS STEEL /
BRASS / ALUMINUM





DRYWALL SCREW 乾牆螺絲

ROOFING SCREW 屋頂螺絲



HEAD

BUGLE

DRIVE



DIAMET

#6~#10

LENGTH

1~4"

THREAD

FINE/COARSE



HEAD

IND HEX WASHER / HEX WASHER

DRIVE





DIAMETER

#6~1/4"

LENGTH

1/4"~4"



Capable to produce different head marking





CHIPBOARD SCREW 塑板螺絲



HEAD FLAT


DRIVE  

DIAMETER #6~#10



LENGTH 1~4"



6-LOBE



POZI



SELF DRILLING SCREW 鑽尾螺絲



HEAD IND HEX WASHER / WAFER / PAN / FLAT / ROUND / TRUSS

DRIVE        



DIAMETER #6~3/8"

LENGTH 3/8"~6"





NAIL SCREW 螺絲釘

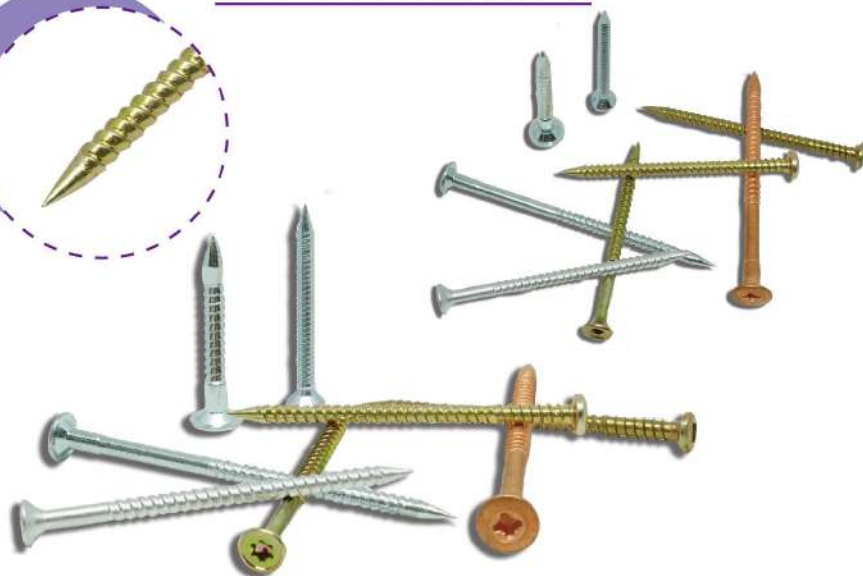

HEAD FLAT/PAN

DRIVE     

DIAMETER M2.8~3.2

LENGTH 30~75mm

MATERIAL CARBON STEEL
STAINLESS STEEL


Combo thread screw



SPECIAL PART 特殊品



SEMS SCREW 組合螺絲

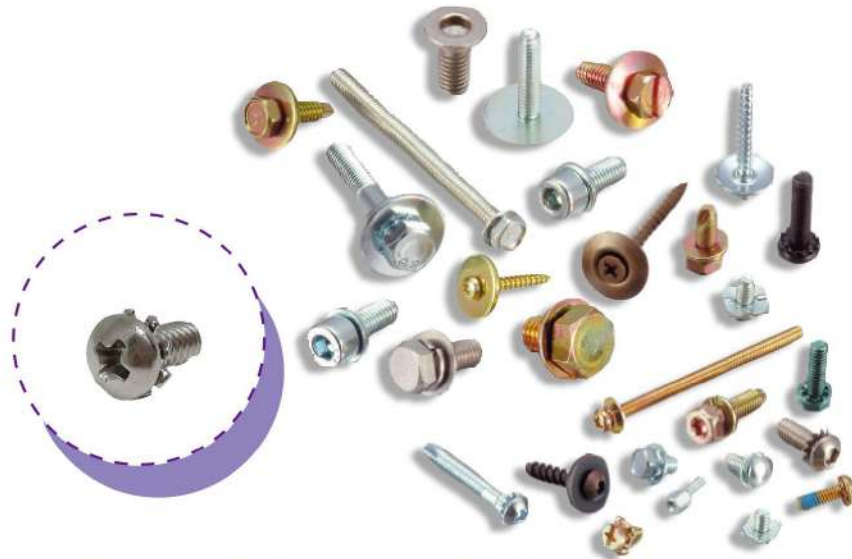

Various Washers Assembled

DIAMETER #10~1/2"

LENGTH 1/8"~4"

MATERIAL CARBON STEEL
STAINLESS STEEL
BRASS
ALUMINUM



NUT 螺帽



DIAMETER M3~M24

LENGTH 4mm~65mm

MATERIAL CARBON STEEL
STAINLESS STEEL
BRASS
ALUMINUM





PUNCH 針具



DRIVE

PHILLIPS - 十字
POZI - 米字
SLOTTED - 一字
TRIANGLE - 三角槽

SQUARE - 四方
HEX - 六角
SIX LOBE - 梅花
TRI WING - 斜Y

OUTSIDE DIAMETER

Ø12mm
Ø14mm
Ø18mm
Ø23mm
Ø30mm

DIES 模具



PUNCH DIES - 沖模

INSERTS - 嵌入模具

TRIMMING DIES - 整緣模具

HEX SEGMENTED DIES - 六片組合

BOLT HEADING DIES - 螺絲打頭模

ALLOY STEEL TOOLS - 合金鋼工具

NUT FORMING DIES - 螺帽成型模

COLD FORMING TOOLS - 冷鍛工具

MULTIPLE STAGES SPECIAL PUNCH DIES - 多沖程特殊模具

FIXED STAMPING MOLD - 固定型沖模

TUNGSTEN CARBIDE DIES - 碳化鎢模具

FLEXIBLE STAMPING MOLD - 活動型沖模

SQUARE NUT FORMING DIES - 四角螺帽模

WELD NUT FORMING DIES - 焊接螺帽成型模

NYLON NUT FORMING DIES - 尼龍螺絲成型模

HEX FLANGE NUT FORMING DIES - 六角凸緣螺帽模

HEX FLANGE BOLT FORMING DIES - 六角凸緣螺絲模





PIN 沖棒



SQUARE HEAD PUNCH - 四角沖棒

RT12-POINTS PIN - R十二角T型沖棒

T-TYPE TORQUE PUNCH - T型梅花沖棒

R-TYPE HEX HEAD PUNCH - R型六角沖棒

T-TYPE SQUARE HEAD PUNCH - T型四角沖棒

R-TYPE SQUARE HEAD PUNCH - R型四角沖棒

T-TYPE SQUARE HEAD PUNCH - T型R四角沖棒

PIN - 圓棒

T-TYPE PUNCH - T型棒

PIERCING PIN - 通孔沖棒

R8-POINTS PIN - R八角沖棒

12-POINTS PIN - 十二角沖棒

R12-POINTS PIN - R十二角沖棒

T12-POINTS PIN - 十二角T型沖棒



SPECIAL PIN - 割溝成型沖棒

T-CENTER PIN - T型中心沖棒

SHOULDER PIN - 三層T型沖棒

HEX HEAD PUNCH - 六角沖棒

SPECIAL HEX PIN - 六角割溝沖棒

ARC HEX HEAD PUNCH - 圓弧六角沖棒

T-TYPE HEX HEAD PUNCH - T型六角沖棒

CENTER PIN - 圓沖

K. O. PIN - T型沖棒

HEX PIN - 六角沖棒

REAR PUNCH - 後沖

FRONT PUNCH - 前沖

8-POINTS PIN - 八角沖棒

T-PIERCING PIN - T型沖棒



CLIPS 夾具



SCREW CLIPS - 螺絲夾具

NUT FEMALE CLIPS - 螺帽母夾

CLIPPER - 剪刀夾

LEG PLATFORM CLAMPS - 夾腿夾座

SPECIAL CLIPS - 特殊夾具



NUT TAP 絲攻



Straight Fluted Tap - 手紋絲攻

Spiral Fluted Tap - 螺旋絲攻

Spiral Pointed Tap - 先端絲攻

Fluteless Tap - 無屑絲攻

NUT Tap - 螺帽絲攻

Taper pipe Threas Tap - 管用絲攻

Trapezoidal Taps - 角牙絲攻

Tungsten Carbide Taps - 超硬絲攻

Drill Taps - 特殊絲攻訂製

Low Carbon Steel - 低碳鋼

High Carbon Steel - 高碳鋼

Tooling Steel - 工具鋼

Stainless Steel - 不銹鋼

Chrome Steel - 鉻鋼

Manganese Steel - 錳鋼

Cast Steel - 鑄鋼

Aluminum - 鋁

Aluminum Alloy - 鋁合金

Copper - 銅




BIT 起子頭



PHILLIPS - 十字
POZI - 米字
SLOTTED - 一字
HEXAGON - 六角
BALL POINT - 球狀

6 LOBE - 梅花
SQUARE - 四角
TORSION BIT - 轉換起子頭
DOUBLE END - 雙頭起子

THREAD ROLLING DIES 牙板

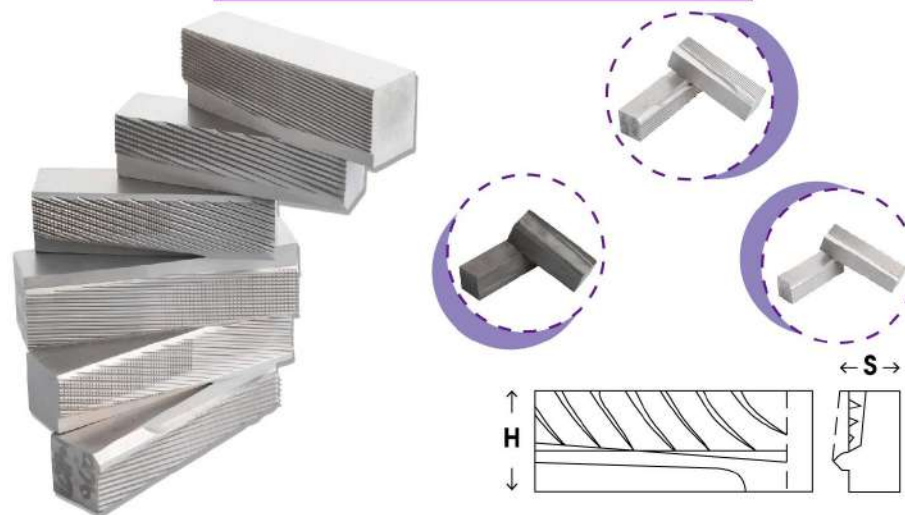

	S	H	Fixing	Moving
NORMAL	19	25	51	64
	25	25.40.45.53	75	90
	25	25.40.55.65.80.105	100	115
	25	25.40.55.65.80.105	127	140
	25	25.40.55.65.80.105	150	165
	35	55.80.105.125.150	190	215
	38	55.80.105.125.150	230	265
	15	20	45	55
SPECIAL	20	25	65	82
	20	25.30.35.40	65	75
	25	25.30.40.55.65	90	105
	25	25.30.45.55.65.80.105.	108	127
	25	25.40.55	110	125
	20.8	25.40.55	73.3	86.2/5°
	20.8	25.40.53.65.80	92.3	105.2/5°
	23.8	25.40.54.65.80.105	112.1	131.2/5°

SCREW POINT CUTTING MACHINE 割尾機




KA-100

- The best user-friendly design & world-class components
- High speed, super durable and extremely precision
- For screw range : M2~M12 & Length from 6 mm to 600 mm.


* CE model is available.




KA-600




TYPE 17



TYPE 23



TYPE 25



TYPE 1

機型 MODEL	可加工直徑 DIAMETER OF SCREW (mm)	可加工長度 LENGTH OF SCREW (mm)	總馬力 POWER (HP) REFERENCE	加工速度 OUTPUT/ MANUFACTURING SPEED	機器尺寸 DIMENSION (L*W*H mm) REFERENCE
KA-50	2 ~ 8	6 ~ 60	4	70 ~ 450	1600*1100*1500
KA-100	2 ~ 8	6 ~ 100	4	70 ~ 450	1600*1100*1500
KA-200	3.5 ~ 8	60 ~ 200	6	20 ~ 300	1800*1600*1500
KA-400	3.5 ~ 10	60 ~ 400	7	20 ~ 300	1800*1600*1500
KA-600	3.5 ~ 10	100 ~ 600	8	20 ~ 300	1800*1600*1500

上表未列出機種，為特殊訂製型。

If you cannot find proper model from this table, please contact with us and we will design proper machines for you.

CARBIDE ROD

鎢鋼棒材



ST12F

特性:晶粒0.2~0.3um 的超細晶硬質合金

PROPERTIES: Grade 0.2~0.3um ultra-fine cemented carbide

適合加工材料:高淬硬鋼(硬度>HRC60)、玻纖強化材料、石墨, 尤其適合高速切削和幹切削。

APPLICATIONS : Quenched steels(hardness>HRC60), Glass Fiber Reinforced composites, Graphite and high speed dry cutting tools.

*刀具製備時注意控制進給量,防止在刀具加工中出現斷刀、崩刀。

NOTICE: should control the feed speed, prevent the break.

ST25F

特性:晶粒0.2~0.3um 的超細晶硬質合金

PROPERTIES: Grade 0.2~0.3um ultra-fine cemented carbide

適合加工材料:鈦合金、高溫合金、不銹鋼等

APPLICATIONS : Stainless steels, High-temperature alloys titanium, ect.

*注意控制進給量

NOTICE THE FEED SPEED

Suitable for those products which may under various loading conditions at different locations at different working environments
High performance cemented carbides for mold and tooling

FULLY-DENSE



全緻密

TUNABLE RESIDUAL STRESS

有效控制內應力

ELECTROCHEMICAL CORROSION RESISTANCE

抗電化學腐蝕

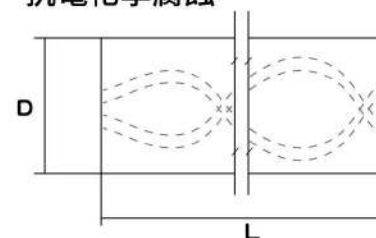

牌號 Grade	WC晶粒度 Grain size of WC um	鈷含量 Co%	硬度 Hardness		密度 Density g/cm ³	抗彎強度 Flexural Strength MPa
			HAR	HV		
ST10F	0.6	6	92.9	1850	14.8	3300
ST11F	0.6	8	92.3	1750	14.6	3800
ST12F	0.2~0.3	9	93.8	1930	14.4	4500
ST20F	0.6	10	91.7	1680	14.4	4300
ST25F	0.2~0.3	12	92.2	1740	14.1	5100